

# SPEL Puraceptor class 1 full retention separators – Single chamber models


Compliant to the European Standard BS EN 858-1:2002, the Environment Agency's Pollution Prevention Guidelines PPG3 and the Construction Products Regulations

Model	Series	Nominal size (NS)	Catchment area (m <sup>2</sup> )	Oil storage (litres)	Silt capacity (litres)	Overall length* (mm) L	Overall diameter (mm)	Inlet Invert (mm) A	Base to Inlet (mm) B	Base to outlet (mm) C	Max in/ out pipe diameter (mm)	Number of access shafts (dia. mm)			
												600	750	900	1200
P004/1CSC	200	4	222	40	400	1,720	1225	540	1,200	1,140	160	-	1	-	-
P006/1CSC	200	6	333	60	600	2,270	1225	540	1,200	1,140	160	-	1	-	-
P010/1CSC	200	10	556	100	1,000	3,410	1225	540	1,200	1,140	160	-	1	-	-
P015/1CSC	300	15	833	150	1,500	3,200	1875	350	1,800	1,740	225	-	1	-	-
P020/1CSC	300	20	1111	200	2,000	3,540	1875	350	1,800	1,740	225	1	1	-	-
FP1CSC	300	20	1111	200	2,000	4,290	1875	350	1,800	1,740	225	-	1	-	-
P030/1CSC	300	30	1667	300	3,000	4,420	1875	390	1,760	1,700	300	1	-	1	-
P040/1CSC	300	40	2222	400	4,000	5,760	1875	390	1,760	1,700	300	1	-	1	-
P050/1CSC	300	50	2778	500	5,000	7,060	1875	390	1,760	1,700	300	1	-	1	-
P065/1CSC	400	65	3611	650	6,500	4,810	2700	425	2,625	2,525	300	1	-	2	-
P080/1CSC	400	80	4444	800	8,000	5,700	2700	425	2,625	2,525	300	1	-	2	-
P100/1CSC	400	100	5555	1000	10,000	7,400	2700	475	2,575	2,475	400	1	-	2	-
P125/1CSC	400	125	6944	1250	12,500	8,580	2700	475	2,575	2,475	400	-	1	2	-
P150/1CSC	400	150	8333	1500	15,000	10,180	2700	475	2,575	2,475	400	-	1	2	-
P165/1CSC	400	165	9166	1650	16,500	11,200	2700	500	2,550	2,450	450	2	1	1	-
P200/1CSC	400	200	11110	2000	20,000	13,710	2700	660	2,390	2,290	600	2	1	1	-
P250/1CSC	400	250	13888	2500	25,000	16,750	2700	660	2,390	2,290	600	2	1	2	-
P300/1CSC	500	300	16665	3000	30,000	12,410	3650					1	2	2	-
P400/1CSC	500	400	22220	4000	40,000	15,760	3650					2	2	2	-
P500/1CSC	500	500	27775	5000	50,000	20,530	3650					2	2	1	1
P500/1CSC	600	500	27775	5000	50,000	16,040	4150					2	2	1	1
P550/1CSC	600	550	30553	5500	55,000	17,450	4150					2	2	1	1
P600/1CSC	600	600	33330	6000	60,000	19,080	4150					2	2	-	2
P800/1CSC	600	800	44440	8000	80,000	24,660	4150					3	2	2	1
P1000/1C	600	1000	55550	10000	-	22,270	4150					3	2	1	3

To suit site drainage requirements

Model **FP1C** is a special forecourt unit with 7600 litre spillage holding capacity.

\*Overall length subject to inlet/outlet size and orientation.

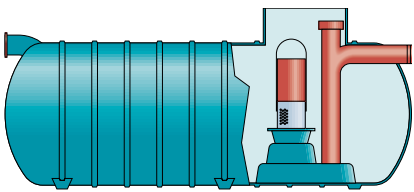

Single chamber models.

